


Cold Air Gun

Models 610, 620, 630

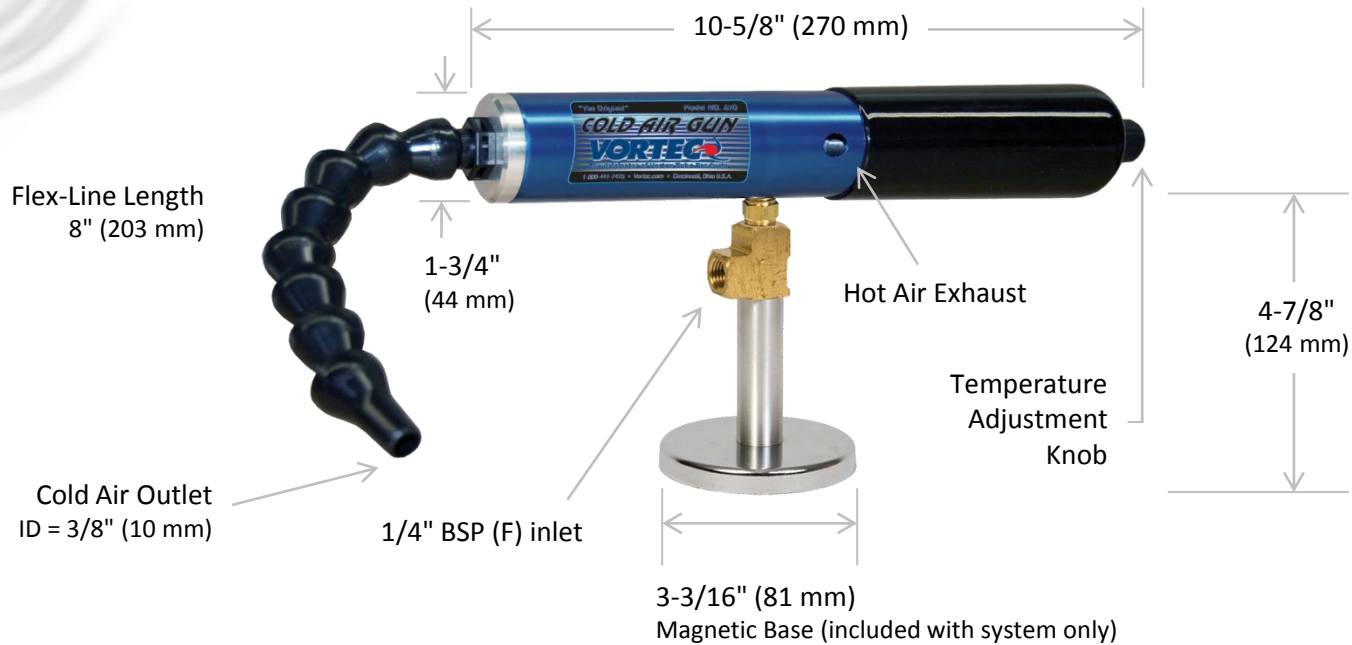

SPECIFICATIONS

| Product | | Cooling Capacity | | Air Consumption | | Minimum Temp Achieved ² | | Outlet Air Flow Rate | | Weight, lbs/kg | |
|---------------------|----------|------------------|-------|-----------------|------|------------------------------------|-------|----------------------|-----------|----------------|-----------|
| System ¹ | Gun Only | BTU/hour | Watts | SCFM | SLPM | Deg F | Deg C | SCFM | SLPM | System | Gun Only |
| 610 | 610-1 | 900 | 264 | 15 | 425 | -10 | -23 | 2 – 15 | 57 – 425 | 3.0 / 1.4 | 1.0 / 0.5 |
| 620 | 620-1 | 1500 | 440 | 25 | 708 | 10 | -12 | 8 – 25 | 227 – 708 | 3.0 / 1.4 | 1.0 / 0.5 |
| 630 | 630-1 | 2500 | 733 | 35 | 990 | 30 | -1 | 18 – 35 | 510 – 990 | 3.0 / 1.4 | 1.0 / 0.5 |

¹ System includes magnetic base and compressed air filter

² 70 deg F/20 deg C inlet compressed air

Note: Specifications are for 100 psig (6.9 bar) compressed air